

TRANSMITTAL FOR U.S. PATENT APPLICATION
UNDER 37 CFR §1.53(b)Box Patent Application
ASSISTANT COMMISSIONER
OF PATENTS
Washington, D.C. 20231Attorney's Docket No.:
020431.0732

Sir:

Transmitted herewith for filing is the original patent application of:

Inventor: Larry P. Mason

For: *SYSTEM AND METHOD FOR TRANSFORMING CUSTOM CONTENT
GENERATION TAGS ASSOCIATED WITH WEB PAGES*Enclosed are: Specification, Claims and Abstract (25 Total Pages)
5 Sheets of Formal Drawings
Declaration and Power of Attorney
Assignment, and Transmittal Therefor
Information Disclosure Statement (IDS) PTO-1449
with copies of IDS Citations
Acknowledgment Post Card

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee \$690.00
Total Claims:	30	-20 =	10	\$18 =	\$180.00
Independent Claims	4	- 3 =	1	\$78 =	\$ 78.00
TOTAL FILING FEE =					\$948.00

Enclosed is a check in the amount of \$948.00. Please charge any additional fees or credit
any overpayment to Deposit Account No. 02-0384 of BAKER BOTTS L.L.P.BAKER BOTTS L.L.P.
Attorneys for Applicant

Date

9/28/00

Christopher W. Kennerly
Registration No. 40,675

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Larry P. Mason
Date Filed: September 28, 2000
Title: *SYSTEM AND METHOD FOR
TRANSFORMING CUSTOM CONTENT
GENERATION TAGS ASSOCIATED WITH
WEB PAGES*

Box Patent Application
Honorable Assistant Commissioner of
Patents
Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application, Declaration and Power of Attorney, Assignment, Assignment Cover Sheet, five sheets of Formal Drawings, Fee Transmittal, this Certificate of Mailing and a check in the amount of \$948.00, and a check in the amount of \$40.00 are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 28th day of September, 2000 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Willie Jiles

Willie Jiles

Express Mail Receipt
No. EL501023491US

SYSTEM AND METHOD FOR TRANSFORMING CUSTOM CONTENT
GENERATION TAGS ASSOCIATED WITH WEB PAGES

TECHNICAL FIELD OF THE INVENTION

This invention relates to document tags, and more particularly to a system and method for transforming custom content generation tags associated with web pages.

009260-08252960

BACKGROUND OF THE INVENTION

With the increasing popularity of the Internet, technologies for creating and delivering web pages to users are continuously being developed and refined. Web pages that have static content can be created relatively easily using Hypertext Markup Language (HTML) to define the content of the pages. However, it is more difficult to create dynamic page content that is based on a user request, system status, or other input. One solution has been to use "servlets," such as JAVA servlets, to dynamically create web page content. JAVA servlets are JAVA programs that execute at a web server (as opposed to an "applet," which executes in a web browser) and that receive a HyperText Transfer Protocol (HTTP) request, dynamically generate a response to the request, and communicate the response to the web browser in the form of an HTML file. When using this approach, however, the entire web page (the HTML file) must be created by the servlet. Therefore, if a web page developer wishes to modify the appearance of the web page, the developer must access, edit, and recompile the servlet. This is true even if the developer only wants to change the formatting of the web page and does not want to change the logic of the program and the content that the logic creates.

Certain technologies have begun to be developed to separate the application logic from the appearance of the web page and to allow the appearance of the page to be changed without having to access the logic that creates the content. An example of such technology is the JAVASERVER PAGE (JSP) technology. A JSP file is basically an HTML file that includes additional components that execute application logic to generate content. Using JSP technology, web page developers use HTML or Extensible Markup Language (XML) tags to design and format a web page. In addition to the HTML and XML tags, the JSP file also includes JSP tags and/or scriptlets that generate content in the web page. The application logic that generates the content may be included in JAVA programs, such as JAVABEANS, that are executed at the web server using the JSP tags. The HTML and XML tags are used to format the content produced by the JSP tags and scriptlets, such that the appearance of the page may be changed by modifying the HTML or XML tags without having to modify the underlying JAVA programs that are generating the content.

10

Table 1. Demographic and clinical characteristics of the study population	
Age (years)	65.2 ± 10.5
Gender (male/female)	102/108
Education (years)	12.5 ± 2.5
Marital status (married/divorced/widowed)	150/30/20
Occupation (retired/working)	150/30
Smoking status (smoker/non-smoker)	100/120
Alcohol consumption (yes/no)	20/180
Comorbidities (hypertension/diabetes/cholesterol)	120/80/100
Medication (antidepressants/antipsychotics)	150/30
Duration of illness (years)	10.5 ± 5.5
Severity of illness (mild/moderate/severe)	100/50/50
Family history of mental illness (yes/no)	30/170
Social support (high/low)	100/100
Stressors (work/family/health)	150/30
Quality of life (high/low)	100/100
Overall health (good/fair/poor)	100/50/50
Life satisfaction (high/low)	100/100
Resilience (high/low)	100/100
Optimism (high/low)	100/100
Gratitude (high/low)	100/100
Forgiveness (high/low)	100/100
Compassion (high/low)	100/100
Kindness (high/low)	100/100
Generosity (high/low)	100/100
Patience (high/low)	100/100
Self-control (high/low)	100/100
Emotional stability (high/low)	100/100
Stress management (high/low)	100/100
Problem-solving (high/low)	100/100
Decision-making (high/low)	100/100
Communication (high/low)	100/100
Relationships (high/low)	100/100
Community involvement (high/low)	100/100
Volunteering (high/low)	100/100
Charitable giving (high/low)	100/100
Religious/spiritual beliefs (high/low)	100/100
Prayer (high/low)	100/100
Meditation (high/low)	100/100
Yoga (high/low)	100/100
Exercise (high/low)	100/100
Healthy diet (high/low)	100/100
Sleep (high/low)	100/100
Hydration (high/low)	100/100
Personal hygiene (high/low)	100/100
Household management (high/low)	100/100
Financial management (high/low)	100/100
Time management (high/low)	100/100
Goal setting (high/low)	100/100
Self-reflection (high/low)	100/100
Personal growth (high/low)	100/100
Life purpose (high/low)	100/100
Meaning in life (high/low)	100/100
Existential well-being (high/low)	100/100
Overall well-being (high/low)	100/100

SUMMARY OF THE INVENTION

According to the present invention, disadvantages and problems associated with previous techniques for processing document tags have been substantially reduced or eliminated.

5 According to one embodiment of the present invention, a system for transforming custom content generation tags includes a web server that receives a request from a web browser. The request identifies a file that includes one or more custom content generation tags that the web browser is unable to interpret. The system also includes a transformation engine that receives the custom content generation tags from the web server and transforms the custom content generation tags into first output that the web browser is able to interpret. The transformation engine communicates the first output to the web server and the web server communicates the first output to the web browser in response to the request.

10 The system and method of the present invention provide a number of important technical advantages. The use of custom or other content generation tags in files that generate web pages allows for the appearance and formatting of content produced by the tags to be modified without actually modifying the logic generating the content. For example, JSP 1.1 allows for the use of custom tags to create content in web pages. However, previous versions of JSP (such as JSP 1.0) do not provide for these custom tags (these versions are not "forward compatible"). Therefore, the ability of individuals and businesses using earlier versions of JSP to create and host web pages has been hampered. For example, these individuals and businesses are unable to use the extensive libraries of custom tags that are being created to easily generate dynamic content on their web pages.

15 20 25 30 The present invention eliminates or reduces this problem by providing for the transformation of JSP custom tags or other types of custom tags to a format that can be processed by older versions of JSP and other web page hosting technologies. For example, JSP custom tags may be included in a JSP file that is to be processed using a JSP 1.0 engine. When the JSP file is requested by a web browser, the JSP file including the custom tags is sent to the JSP 1.0 engine. The JSP engine processes the portions of the JSP file that it understands (such as scriptlets and standard JSP tags) and then communicates the results of the processing and the unprocessed custom tags

to a transformation engine. The transformation engine is used to transform the custom tags into HTML, XML, or other appropriate code that can be interpreted using a web browser. Alternatively, any other type of file including JSP or other custom tags may be communicated to the transformation engine to transform the custom tags.

5 Therefore, even if an individual or business that hosts web pages does not have an engine capable of interpreting custom tags, the individual or business can still incorporate custom tags in their web pages and benefit from the advantages of custom tags. Techniques incorporating one or more of these or other advantages are well suited to a variety of web page development, hosting, and processing environments.

10 Other technical advantages are readily apparent to those skilled in the art from the following figures, descriptions and claims.

008250-08252960

To provide a more complete understanding of the present invention and the features and advantages thereof, reference is made to the following description taken in conjunction with the accompanying drawings, in which:

FIGURE 2 illustrates an exemplary JSP page that may be included in a JSP file;

FIGURE 4 illustrates an exemplary XSL stylesheet used to transform custom tags;

FIGURE 6 illustrates an exemplary method of providing web pages including custom tags to a web browser using a JSP engine that is unable to process the custom tags; and

FIGURE 7 illustrates an exemplary method of providing web pages including custom tags to web browser without using a JSP engine.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 illustrates an exemplary system 10 for transforming custom tags in a web page. System 10 includes a web browser 12 executing on one or more computers 14 at one or more locations. Browser 12 is coupled to a communications network 16 and may include any suitable HTTP (HyperText Transfer Protocol) client or other appropriate software and/or hardware for receiving web pages or other data using network 16. For example, browser 12 may include software such as INTERNET EXPLORER by MICROSOFT CORPORATION or NETSCAPE COMMUNICATOR by NETSCAPE COMMUNICATIONS CORPORATION. Browser 12 may generate one or more content requests 18 for web pages or other content in response to input from a user associated with browser 12. For example, browser 12 may generate an HTTP request 18 that includes a Uniform Resource Locator (URL) portion identifying the requested item of content and a header portion containing further information about HTTP request 18.

System 10 also includes a web server 20. Server 20 is coupled to network 16 and may include any suitable HTTP server or other appropriate software and/or hardware for communicating web pages or other data to one or more browsers 12 using network 16. Network 16 may include the Internet, a wide area network (WAN), a local area network (LAN), or any other appropriate wireline or wireless network or networks. Browser 12 may communicate a request 18, as described above, to server 20 using communication network 16. Such a request may indicate a desire to receive a file from server 20. For example, server 20 may have access to and be able to provide one or more files 24 stored in database 26 (and identified by a URL according to where they are stored).

Although files 24 may include any appropriate files that may be communicated to browser 12 or that may be used to create content for communication to browser 12, an exemplary type of file 24 is a JAVASERVER PAGE (JSP) file. A JSP file is basically a HyperText Markup Language (HTML) file that includes additional components that execute application logic to generate dynamic content. Using JSP technology, web page developers use HTML and/or Extensible Markup Language (XML) tags to design and format a web page. In addition to the HTML and XML tags, the JSP file also includes JSP tags and/or scriptlets that generate content in

the web page. The HTML and XML tags in the JSP file 24 are used, in part, to format the content generated by the JSP tags and scriptlets.

JSP files 24 may be text files including the various tags and scriptlets, servlets or "JSP page implementation classes," or any other appropriate file formats. When
5 server 20 receives a request for a JSP file 24, server 20 accesses the file 24 in database 26 and loads the file 24 to a JSP engine (or container) 28. Although JSP engine 28 is primarily described, the present invention contemplates any suitable web page processing engine. JSP engine 28 may be implemented as software and/or hardware that is a part of or separate from web server 20. JSP engine 28 is used to interpret the
10 JSP tags and scriptlets to generate content. A JSP file 24 may instruct JSP engine 28 to generate content using a variety of techniques. For example, JSP standard content generation tags (or "standard tags") in a file 24 may instruct JSP engine 28 to access and instantiate JAVABEAN or Enterprise JAVABEAN components, set and retrieve bean attributes, download applets, access a database to retrieve data (for example, using JDBC objects), use Remote Method Invocation (RMI) objects, and/or include
15 one or more files. The JAVABEAN or ENTERPRISE JAVABEAN components, applets, JDBC and RMI objects, files to be included, and other appropriate files used by JSP engine 28 (all of which will be generally referred to as files 30) may be stored in a database 32 coupled to JSP engine 28. In addition to processing JSP tags, JSP
20 engine 28 may execute JAVA or other scriptlets in a JSP file 24 to generate content or may use any other appropriate technique for generating content.

In addition to JSP standard tags and scriptlets, JSP files 24 may include one or more JSP custom content generation tags (or "custom tags"). Although custom JAVA code can be included in JSP files 24 as one or more scriptlets that create content,
25 custom tags can be used to create this same content by executing JAVA applications that are separate from file 24. Therefore, instead of having to include JAVA code in a JSP file 24, a web developer only has to include a custom tag and a minimal amount of supporting code. However, as described more fully below, not all JSP or other web page processing engines 28 are able to process custom content tags. Therefore,
30 system 10 also includes a transformation engine 34 that transforms custom tags in a JSP or other file 24 into a format that can be interpreted by web browser 12. Transformation engine 34 performs this transformation using stylesheets 36 that may

be stored in a database 38. Web server 20, JSP engine 28, and transformation engine 34 may each operate on one or more computers 22 at one or more locations. One or more of these components may also share a computer 22. Furthermore, databases 26, 32, and 38 may each include one or more storage locations and/or devices integral to or separate from one another and may use any appropriate techniques or components for storing files and other data.

FIGURE 2 illustrates an exemplary JSP page 50 that may be included in a JSP file 24. Page 50 may include one or more directives 52, JSP standard tags (or actions) 54, expressions 56, declarations 58, scriptlets 60, JSP custom tags 62, or any other suitable components, in any suitable combination. Page 50 may also include HTML code 64 that formats the foregoing components and produces selected text on the web page generated using page 50. Directives 52 are instructions processed by JSP engine 28 when page 50 is compiled into a servlet for execution or is otherwise loaded to JSP engine 28. Directives 52 may be used, for example, to set instructions, specify custom tag libraries, and insert data from external files. For example, directive 52a is used to specify a custom tag library used by custom tag 62, described below. Directive 52b is used to define the language used in page 50 (JAVA) and to import the JAVA classes needed by the embedded JAVA code in page 50..

As described above, JSP standard tags 54 are used to perform a variety of functions, such as accessing and using JAVABEANS components. For example, exemplary tag 54 is used to initialize a JAVABEAN that is used in subsequent portions of page 50. Expressions 56 are variables or constants inserted in the data that JSP engine 28 returns to server 20 after processing page 50. In exemplary page 50, expressions 56 make calls on a JAVABEAN component and insert the resulting data (in this case, the day of the month and the year) into page 50. Declarations 58 are used to define variables for use in expressions 56 or scriptlets 60. In page 50, the exemplary declaration 58 initializes a *time* variable and assigns a value to the variable. Scriptlets 60 are blocks of JAVA code that are executed verbatim by JSP engine 28. The exemplary scriptlet 60 determines the time of day and generates an appropriate greeting (either "Good Morning" or "Good Afternoon").

Page 50 also includes an exemplary custom tag 62 that instructs JSP engine 28 to generate a button. As described above, custom tags 62 extend the capabilities of

JSP to allow web page developers to define tags and the content that the tags should generate. Although the button could be created by directly inserting HTML code or a JAVA scriptlet 60 into page 50, the use of custom tag 62 helps to separate the content generation and formatting tasks of creating a JSP page 50. For example, instead of
5 having to know how to generate certain content using HTML, JAVA, or other appropriate code, an unsophisticated web page developer can simply insert a custom tag 62 and a directive 52 specifying a tag library that defines the custom tag 62. Custom tag 62 may be expressed in an XML or "XML-like" format.

Exemplary page 50 includes a *taglib* directive 52a that identifies the location
10 of a tag library descriptor (*i2.tld*) and defines a tag attribute (*prefix='i2'*). A tag library descriptor is an XML file that defines a custom tag 62 and that connects it to an associated tag handler class. A tag library descriptor includes the various attributes of the tag 62, the name and location of the tag handler class, and any information that JSP engine 28 needs to process the custom tag 62. A tag handler class is a JAVA
15 class (compiled JAVA source code) that executes the operations associated with the custom tag 62. For example, to process custom tag 62 in exemplary page 50, a JAVA class is used to create a graphical button that, when clicked, generates "*OUCH – stop that*" as synthesized speech. One skilled in the art will understand how to create custom tags 62 and the associated tag library descriptors and tag handler classes, so
20 the contents of these components will not be described in further detail.

FIGURE 3 illustrates an exemplary method of providing web pages that include custom tags 62 to web browser 12. This method assumes that JSP engine 28 is capable of processing custom tags 62 to generate content. The method begins at step 102 with the creation of a file 24 that includes JSP or other custom tags 62, as
25 described above. At step 104, file 24 is stored in database 26. Server 20 receives a request 18 for file 24 from web browser 12 at step 106. At step 108, file 24 is loaded to JSP engine 28 and JSP engine 28 processes file 24 to create HTML or other appropriate output. This processing includes the processing of custom tags 62 to generate content as described above. JSP engine 28 communicates the HTML or
30 other output to server 20 at step 110, server 20 communicates the output to browser 12 at step 112 as a response 19 to request 18, and the method ends. The present

invention also contemplates that JSP engine 28 may communicate the output directly to browser 12.

As described above, it can be very useful and easy to generate content in a web page using JSP custom tags 62. However, although current versions of JSP (such as JSP 1.1) provide for the use of custom tags 62, earlier versions of JSP (such as JSP 1.0) do not provide for the use of such tags. Therefore, web developers creating pages to be processed using an earlier version of JSP or using another type of web page processing software have not been able to incorporate custom tags 62 in their web pages. Furthermore, other types of custom tags besides JSP custom tags 62 have also been developed. As with JSP custom tags 62, these other types of custom tags are not able to be used without the particular processing engine for which the tags were developed. As with JSP custom tags 62, these other types of custom tags may be XML or "XML-like" tags. All custom tags, whether developed for JSP or other appropriate software or hardware, will be referred to as custom tags 62.

Referring again to FIGURE 1, the present invention addresses the problem of not being able to use custom tags 62 without having a specific processing engine by providing transformation engine 34 that transforms custom tags 62 in a JSP or other file 24 into a format that can be interpreted by web browser 12. Transformation engine 34 may be implemented as software and/or hardware that is a part of or separate from web server 20 and/or JSP engine 28. As an example only, and not by way of limitation, transformation engine 34 may be an Extensible Stylesheet Language Transformation (XSLT) engine or processor. Transformation engine 34 may transform a custom tag 62 to HTML, XML, or any other appropriate type of code (such as Wireless Markup Language, Vector Markup Language, and Scalable Vector Graphics). XSLT is a part of the Extensible Stylesheet Language (XSL) and is typically used to transform the structure of an XML document into another data format (either another form of XML or another type of data, such as HTML). Since custom tags 62 are written in XML or XML-like code, XSLT may also be used to transform custom tags 62 in a file 24.

FIGURE 4 illustrates an exemplary XSL stylesheet 36 used to transform custom tags 62. In an exemplary embodiment, transformation engine 34 uses one or more XSL stylesheets 36 (which may be written in XSLT) to transform custom tags

62 into an appropriate format for interpretation by browser 20. Transformation engine 34 reads a file 24 that includes custom tags 62 and follows the instructions in one or more stylesheets 36 to transform custom tags 62.

Exemplary stylesheet 36 begins with a processing instruction 70 that indicates to transformation engine 34 the type of transformation that is to occur. The exemplary processing instruction 70 indicates the version of the XSL standard that is used and that the transformation is to produce HTML output. Stylesheet 36 also includes one or more templates 72 that may each be used to transform a particular custom tag 62 into HTML or other appropriate code. The first template, template 72a, applies to the entire file 24 to be transformed (as indicated by the "/" in the first line). The *apply-templates* element 74 of template 72a identifies the portions of file 24 that transformation engine 34 is to examine. Exemplary element 74 indicates that the entire file 24 is to be examined (as indicated by the "/" in element 74).

The next template in stylesheet 36, template 72b, applies to exemplary custom tag 62 in the JSP page 50 illustrated in FIGURE 3. This applicability is indicated by including the name of custom tag 62 (*i2:button*) in the first line of template 72b. Template 72 includes HTML code 76 and XSL elements 78 that generate a text string formatted according to portions of HTML code 76. XSL elements 78 include an *attribute* element that assigns an attribute name and value and inserts the name and value into the output produced by transformation engine 34. The name of the attribute is assigned in the first line of the *attribute* element. In the exemplary stylesheet 36, the name assigned is "href". The value of the attribute is given by the contents of the *attribute* element (as identified by the *xsl:value-of* element). The "@" indicates that the value of *href* is the value of an attribute of custom tag 62 (in this case, the value of *onclick*). Referring to the exemplary JSP page 50 illustrated in FIGURE 3, the value given to the *onclick* attribute of the *i2:button* custom tag 62 is as follows: *"javascript:alert('OUCH – stop that!')">Click Me*". Therefore, this text string is assigned as the value of the *href* attribute. The end result of the processing of XSL elements 78 is the insertion of the following text string in the output produced by transformation engine 34: *href="javascript:alert('OUCH – stop that!')">Click Me*". Following the XSL elements 78 are additional HTML tags 76 used to format the output generated by XSL elements 78.

The result of processing a file 24 including custom tags 62 using transformation engine 34 may be that each of the custom tags 62 is replaced with HTML or other appropriate code included within templates in an XSL stylesheet 36. In the exemplary JSP page 50 illustrated in FIGURE 3, there is a single custom tag 62. This custom tag has a corresponding template 72b in the exemplary style sheet 36. Therefore, when JSP page 50 is processed using transformation engine 34, the exemplary custom tag 62 is replaced in the output from transformation engine 34 with the HTML code 76 in template 72b and the text generated by XML elements 78 in template 72b, as described above.

FIGURE 5 illustrates exemplary HTML code 80 that may be included in output produced by transformation engine 34. HTML code 80 is generated when custom tag 62 in exemplary JSP page 50 is transformed using exemplary style sheet 36.

Although the exemplary custom tag 62 described above is used to produce presentation content (a button), custom tags 62 may also be used to generate other types of content. For example, a custom tag 62 may be used to call a component, such as a JAVA class, that accesses a database and generates content based on data retrieved from the database. Information from several sources (for example, databases) may be integrated into a web page using multiple custom tags 62. For instance, if an operator of an electronic business-to-business ("B2B") marketplace wishes to provide a web page that includes information about a contract between two parties, the file 24 used to generate the web page may include a custom tag 62 that accesses information about the contract in the first party's database, another custom tag 62 that accesses information about the contract in the second party's database, and yet another custom tag 62 that accesses information about the contract database operated by the marketplace operator that is facilitating the contract. The information gathered using these custom tags 62 may then be integrated in a web page to provide the parties or others with comprehensive and current information about the contract.

If a JSP or other engine 28 is not available to process such custom tags 62, then the tags 62 may be processed using transformation engine 34. However, since this type of database information is not static (unlike HTML code that may be used to generate a button), the custom tags 62 cannot be replaced with static HTML code

included in a stylesheet 36, as described above. Therefore, instead of containing static HTML code or XSL elements that generate static HTML code, the template in stylesheet 36 that corresponds to each custom tag 62 may instead include code that is used to call a suitable component to access the appropriate database and generate HTML content based on the information retrieved from the database. Such a component may be the same as or similar to the component that a JSP engine 28 would call if a JSP engine 28 was used to process the custom tag 62. Stylesheet 36 may also include code to create dynamic content using any other appropriate techniques. Therefore, transformation engine 34 may be used to replace custom tags 62 with dynamic content, as well as with static content.

FIGURE 6 illustrates an exemplary method of providing web pages that include custom tags 62 to web browser 12 using a JSP engine 28 that is unable to process custom tags 62. Alternatively, JSP engine 28 may be any other appropriate type of web page processing engine that is unable to process custom tags 62. As an example only, and not by way of limitation, JSP engine 28 may be a JSP 1.0 engine. The method begins at step 132 with the creation of a file 24 that includes JSP or other custom tags 62, as described above. At step 134, file 24 is stored in database 26, which is associated with and accessible by web server 20. Server 20 receives a request 18 for file 24 from web browser 12 at step 136. At step 138, file 24 is loaded to JSP engine 28 (or any other appropriate type of engine) and JSP engine 28 processes file 24 to create HTML or other appropriate output. However, since JSP engine 28 is unable to process custom tags 62, custom tags are not processed and remain in the output produced by JSP engine 28 (JSP engine 28 is designed to pass custom tags 62 and other unrecognized tags to the output instead of generating an error message). Therefore, the output produced by JSP engine 38 may include HTML or other content that was originally included in file 24, HTML or other content that was generated by JSP engine 28 based on JSP standard tags and scriptlets in file 24, and the unprocessed custom tags 62. The processing by JSP engine 28 may also include adding a MIME (Multi-Purpose Internet Mail Extensions) header or other appropriate header or indicator to the output to indicate that the output includes unprocessed custom tags 62.

JSP engine 28 communicates the output including the unprocessed custom tags 62 to server 20 at step 140. Based on the MIME or other header indicating the presence of unprocessed custom tags 62, server 20 redirects the output to transformation engine 34 at step 142 instead of communicating the output to browser 12. Server 20 may redirect the output to transformation engine 34 by calling a servlet that includes or uses transformation engine 34. At step 144, transformation engine 34 processes the output from JSP engine 28 and transforms the unprocessed custom tags 62 using one or more stylesheets 36, as described above. In an exemplary embodiment, transformation engine 34 transforms custom tags 62 into HTML code. Therefore, the output produced by transformation engine 34 may include HTML or other content that was originally included in file 24, HTML or other content that was generated by JSP engine 28, and HTML or other content that was generated by transformation engine 34 by processing custom tags 62. Transformation engine 34 communicates this output to server 20 at step 146, server 20 communicates the output to browser 12 at step 148 as a response 19 to request 18, and the method ends. The present invention also contemplates that transformation engine 34 may communicate the output directly to browser 12.

FIGURE 7 illustrates an exemplary method of providing web pages that include custom tags 62 to web browser 12 without using a JSP engine 28. Such a method may be used to process web pages that include custom tags 62, but that do not include any other JSP elements, such as JSP standard tags or scriptlets. The method begins at step 162 with the creation of a file 24 that includes JSP or other custom tags 62, as described above. The other contents of file 24 may include HTML or other code that may be interpreted by browser 12. File 24 may also include a MIME header or other appropriate header that indicates that file 24 includes custom tags 62. At step 164, file 24 is stored in database 26. Server 20 receives a request 18 for file 24 from web browser 12 at step 166. Server retrieves file 24 from database 26 and determines, based on the MIME header or other appropriate information, that file 24 includes custom tags 62 that should be transformed before file 24 or the output from file 24 is communicated to browser 12.

Based on this determination, server 20 communicates file 24 to transformation engine 34 at step 168. At step 170, transformation engine 34 processes file 24 and

transforms custom tags 62 using one or more stylesheets 36, as described above. In an exemplary embodiment, transformation engine 34 transforms custom tags 62 into HTML code. Therefore, the output produced by transformation engine 34 may include HTML or other content that was originally included in file 24 and HTML or other content that was generated by transformation engine 34 by processing the custom tags 62. Transformation engine 34 communicates this output to server 20 at step 172, server 20 communicates the output to browser 12 at step 174 as a response 19 to request 18, and the method ends. Alternatively, transformation engine 34 may communicate the output directly to browser 12.

Although the present invention has been described with several embodiments, numerous changes, substitutions, variations, alterations, and modifications may be suggested to one skilled in the art, and it is intended that the invention encompass all such changes, substitutions, variations, alterations, and modifications as fall within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A system for transforming custom content generation tags, comprising:
a web server operable to receive a request from a web browser, the request
identifying a file comprising one or more custom content generation tags that the web
browser is unable to interpret, and the web server operable to communicate the
custom content generation tags;

a transformation engine operable to receive the custom content generation
tags, transform the custom content generation tags into first output that the web
browser is able to interpret, and communicate the first output to the web server, the
transformation engine unable to interpret the custom content generation tags; and

the web server further operable to receive the first output and to communicate
the first output to the web browser in response to the request.

2. The system of Claim 1, wherein the first output comprises code
selected from the group consisting of HyperText Markup Language (HTML) code,
Extensible Markup Language (XML) code, and Wireless Markup Language (WML)
code.

3. The system of Claim 1, wherein:
the requested file further comprises one or more standard content generation
tags that the web browser is unable to interpret;

the system further comprises a web page processing engine operable to
interpret the standard content generation tags and generate second output that the web
browser is able to interpret, the web page processing engine unable to interpret the
custom content generation tags;

the web page processing engine further operable to communicate the second
output and the unprocessed custom content generation tags to the web server, the web
server communicating the unprocessed custom content generation tags to the
transformation engine; and

the web server further operable to communicate the second output to the web
browser with the first output in response to the request.

4. The system of Claim 3, wherein:

the web server is operable to communicate the second output to the transformation engine with the unprocessed custom content generation tags; and

the transformation engine is operable to communicate the second output back to the web server with the first output.

5. The system of Claim 3, wherein:

the requested file comprises a JAVASERVER PAGE (JSP) file;

the standard content generation tags comprise JSP standard tags;

the custom content generation tags comprise JSP custom tags; and

the web page processing engine comprises a JSP engine unable to process the JSP custom tags.

6. The system of Claim 3, wherein the first and second output comprises

code selected from the group consisting of HyperText Markup Language (HTML) code, Extensible Markup Language (XML) code, and Wireless Markup Language (WML) code.

7. The system of Claim 3, wherein:

the web page processing engine is operable to attach a header to the unprocessed custom content generation tags, the header indicating the presence of the unprocessed custom content generation tags; and

the web server is operable to communicate the unprocessed custom content generation tags to the transformation engine in response to the header.

8. The system of Claim 1, wherein the transformation engine comprises an Extensible Stylesheet Language Transformation (XSLT) engine, the XSLT engine operable to transform the custom content generation tags using an Extensible Stylesheet Language (XSL) stylesheet.

9. The system of Claim 8, wherein the XSL stylesheet comprises one or more templates corresponding to each custom content generation tag, the templates comprising HTML code to replace the corresponding custom content generation tag.

5 10. The system of Claim 9, wherein one or more of the templates comprise code operable to generate HTML code to replace the corresponding custom content generation tag.

008260-08252960

11. A method for transforming custom content generation tags, comprising:

receiving a request from a web browser for a file comprising one or more custom content generation tags that the web browser is unable to interpret;

5 transforming the custom content generation tags using a transformation engine into first output that the web browser is able to interpret, the transformation engine unable to interpret the custom content generation tags; and

communicating the first output to the web browser in response to the request.

10 12. The method of Claim 11, wherein the first output comprises code selected from the group consisting of HyperText Markup Language (HTML) code, Extensible Markup Language (XML) code, and Wireless Markup Language (WML) code.

15 13. The method of Claim 11, wherein:

the requested file further comprises one or more standard content generation tags that the web browser is unable to interpret; and

the method further comprises:

20 processing the file using a web page processing engine operable to interpret the standard content generation tags and generate second output that the web browser is able to interpret, the web page processing engine unable to interpret the custom content generation tags;

communicating the unprocessed custom content generation tags to the transformation engine; and

25 communicating the second output to the web browser with the first output in response to the request.

30 14. The method of Claim 13, further comprising communicating the second output to the transformation engine with the unprocessed custom content generation tags, the second output being unaffected by the transformation engine.

15. The method of Claim 13, wherein:
the requested file comprises a JAVASERVER PAGE (JSP) file;
the standard content generation tags comprise JSP standard tags;
the custom content generation tags comprise JSP custom tags; and
5 the web page processing engine comprises a JSP engine unable to process the
JSP custom tags.

16. The method of Claim 13, wherein the first and second output
comprises code selected from the group consisting of HyperText Markup Language
10 (HTML) code, Extensible Markup Language (XML) code, and Wireless Markup
Language (WML) code.

17. The method of Claim 13, wherein:
the method further comprises attaching a header to the unprocessed custom
15 content generation tags, the header indicating the presence of unprocessed custom
content generation tags; and
the unprocessed custom content generation tags are communicated to the
transformation engine in response to the header.

18. The method of Claim 11, wherein the transformation engine comprises
an Extensible Stylesheet Language Transformation (XSLT) engine, the XSLT engine
operable to transform the custom content generation tags using an Extensible
20 Stylesheet Language (XSL) stylesheet.

19. The method of Claim 18, wherein the XSL stylesheet comprises one or
more templates corresponding to each custom content generation tag, the templates
comprising HTML code to replace the corresponding custom content generation tag.

20. The method of Claim 19, wherein one or more of the templates
30 comprise code operable to generate HTML code to replace the corresponding custom
content generation tag.

009260" 08/5/99

21. Custom tag transformation software embodied in a computer-readable medium and operable to:

receive a request from a web browser for a file comprising one or more custom content generation tags that the web browser is unable to interpret;

5 transform the custom content generation tags into first output that the web browser is able to interpret; and

communicate the first output to the web browser in response to the request.

22. The software of Claim 21, wherein the first output comprises code
10 selected from the group consisting of HyperText Markup Language (HTML) code, Extensible Markup Language (XML) code, and Wireless Markup Language (WML) code.

23. The software of Claim 21, wherein:
15 the requested file further comprises one or more standard content generation tags that the web browser is unable to interpret; and

the software is further operable to:

interpret the standard content generation tags and generate second output that the web browser is able to interpret; and

20 communicate the second output to the web browser with the first output in response to the request.

24. The software of Claim 23, wherein:
the requested file comprises a JAVASERVER PAGES (JSP) file;
25 the standard content generation tags comprise JSP standard tags; and
the custom content generation tags comprise JSP custom tags.

25. The software of Claim 23, wherein the first and second output comprises code selected from the group consisting of HyperText Markup Language
30 (HTML) code, Extensible Markup Language (XML) code, and Wireless Markup Language (WML) code.

003260-08257950

26. The software of Claim 21, further operable to transform the custom content generation tags using an Extensible Stylesheet Language (XSL) stylesheet.

5 27. The software of Claim 26, wherein the XSL stylesheet comprises one or more templates corresponding to each custom content generation tag, the templates comprising HTML code to replace the corresponding custom content generation tag.

10 28. The software of Claim 27, wherein one or more of the templates comprise code operable to generate HTML code to replace the corresponding custom content generation tag.

008269" 08/5/96

5

10

15

20

SYSTEM AND METHOD FOR TRANSFORMING CUSTOM TAGS

ABSTRACT OF THE DISCLOSURE

A system (10) for transforming custom content generation tags (62) includes a web server (20) that receives a request (18) from a web browser (12). The request (18) identifies a file (24) that includes one or more custom content generation tags (62) that the web browser (12) is unable to interpret. The system (10) also includes a transformation engine (34) that receives the custom content generation tags (62) from the web server (20) and transforms the tags (62) into first output that the web browser (12) is able to interpret. The transformation engine (34) communicates the first output to the web server (20) and the web server (20) communicates the first output to the web browser (12) in response to the request (18).

0967580.09200
003250" 08/27/99

008260" 08/5/960

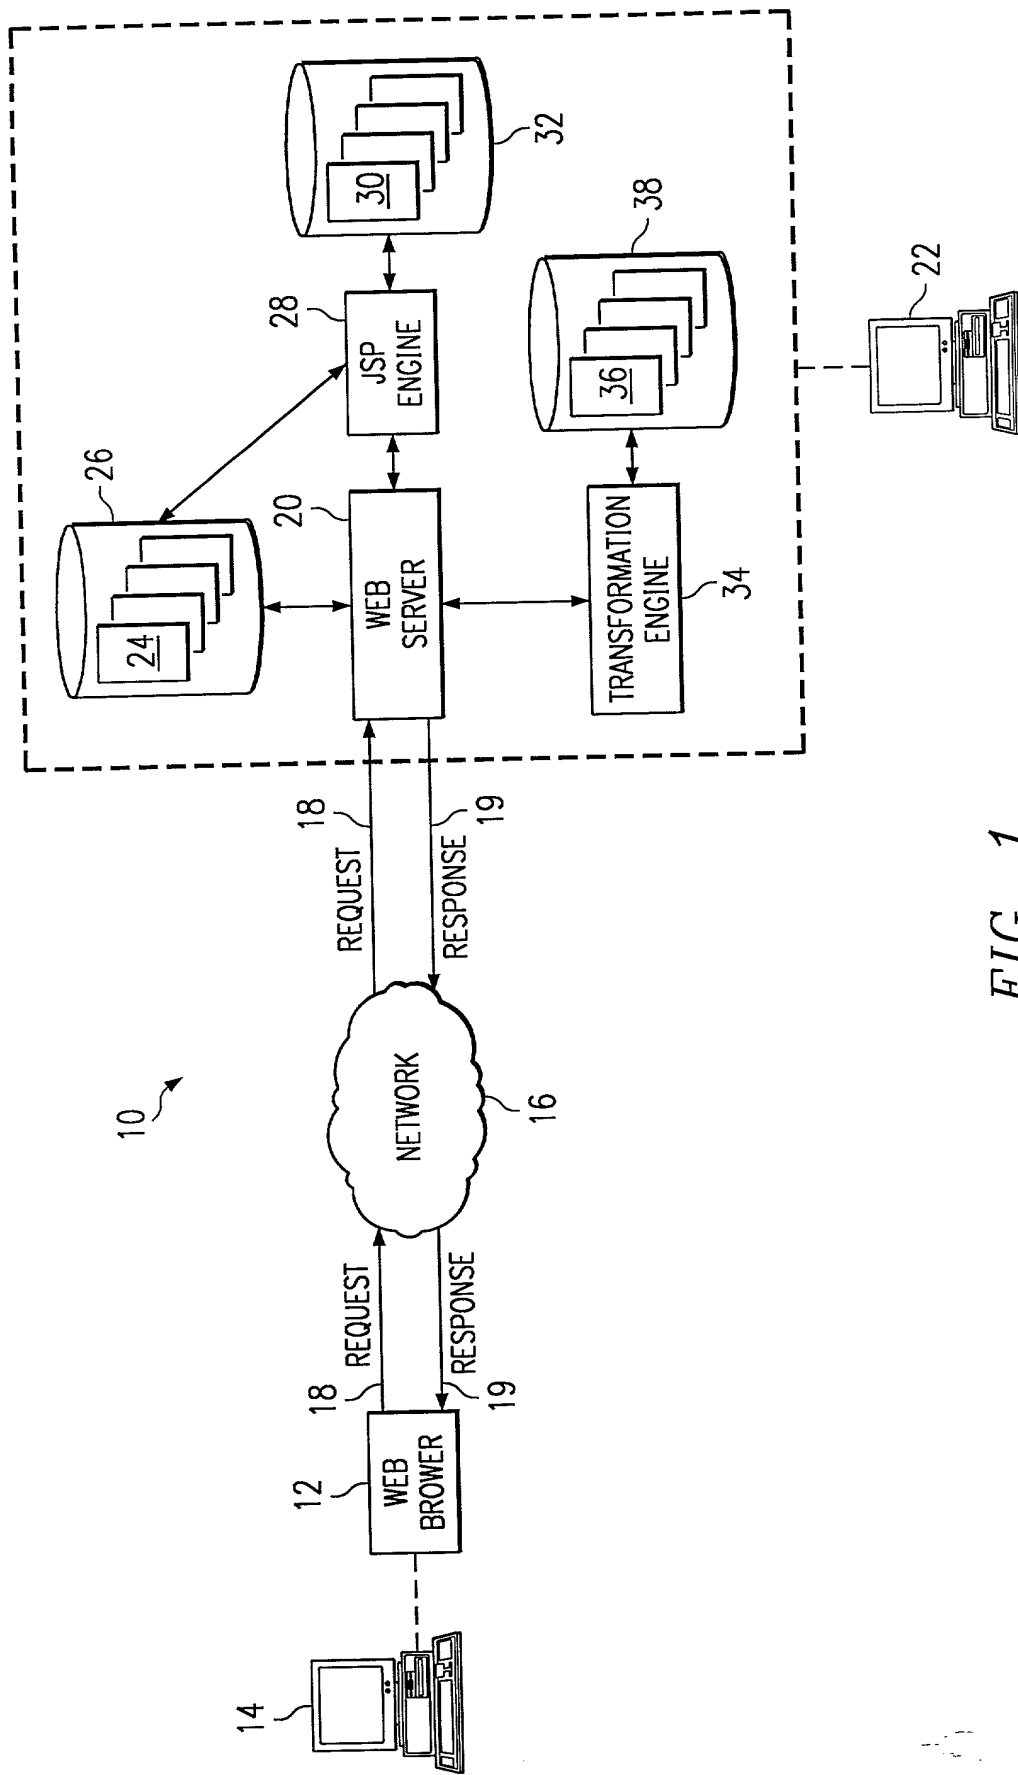


FIG. 1

FIG. 2

FIG. 3

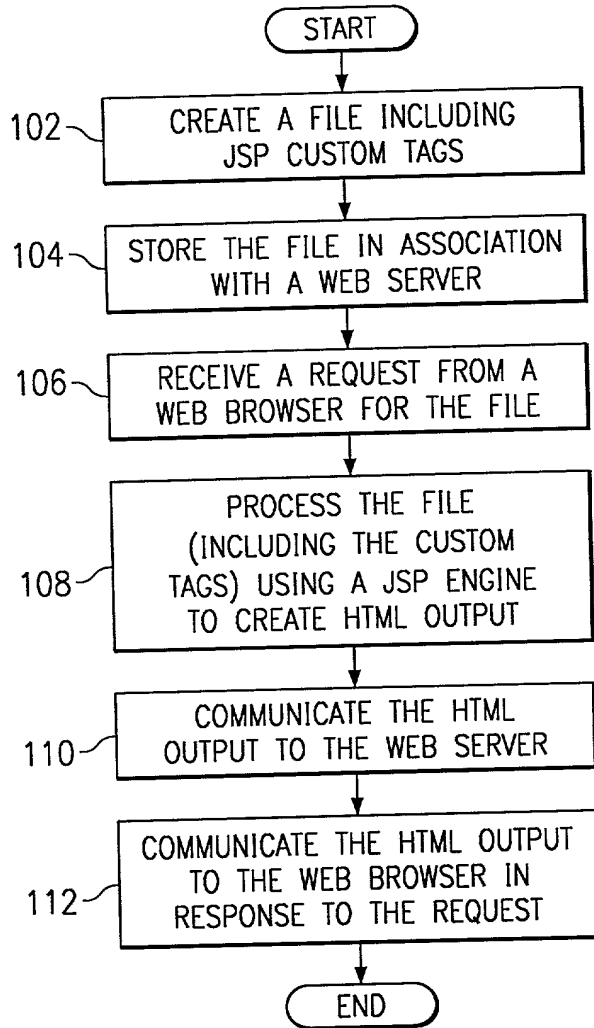


FIG. 7

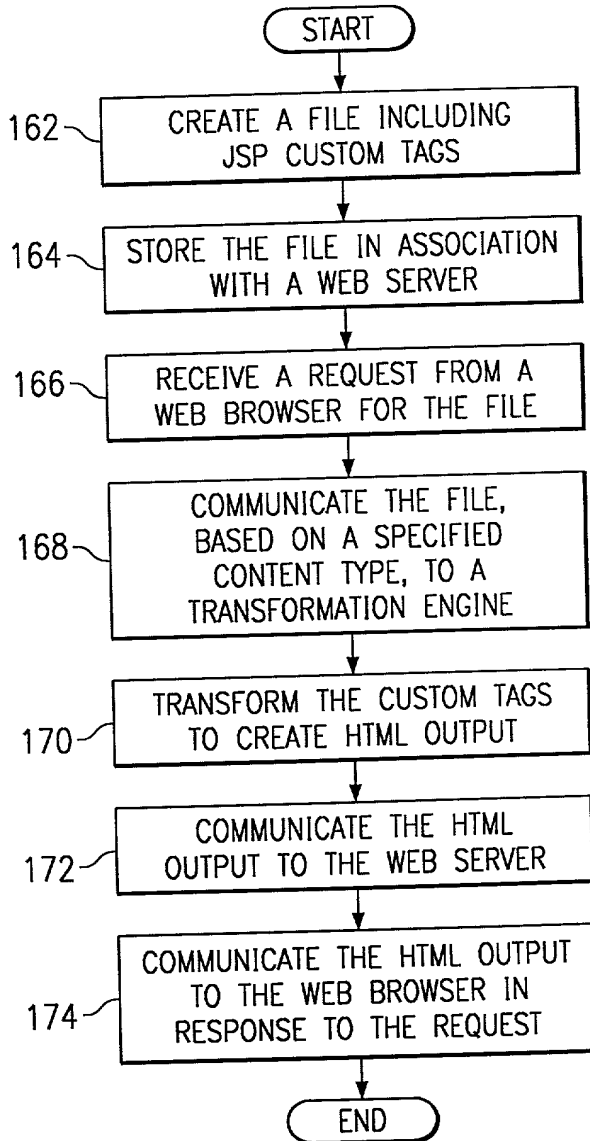


FIG. 4

36

```

<xsl:stylesheet
xmlns:xsl = "http://www.w3.org/1999.XSL/Transform"
xmlns:i2 = "http://www.i2.com"
exclude-result-prefixes = "i2"
result-ns = " "
<xsl:output method = "html"/>
<xsl:template match="/">
  <xsl:apply-templates />
</xsl:template>
<xsl:template match = "i2:button">
  <TABLE width = "65" border = "1" cellspacing = "0" cellpadding = "2">
    <TR>
      <TD class = "buttonText" nowrap = "yes">
        <A class = "buttonText">
          <xsl:attribute name = "href">
            <xsl:value-of select = "@onclick"/>
          </xsl:attribute>
          <xsl:value-of select = "."/>
        </A>
      </TD>
    </TR>
  </TABLE>
</xsl:template>
</xsl:stylesheet

```

Diagram labels in FIG. 4:

- 70: Grouped around the first four lines of the stylesheet (xmlns declarations and output method).
- 72a: Grouped around the root template and the `<xsl:template match = "i2:button">` opening tag.
- 74: Points to the `<xsl:apply-templates />` line.
- 76: Grouped around the `<TABLE>`, `<TR>`, and `<TD>` opening tags.
- 78: Grouped around the `<xsl:attribute name = "href">`, `<xsl:value-of select = "@onclick"/>`, and `</xsl:attribute>` lines.
- 72b: Grouped around the `<xsl:value-of select = "."/>`, ``, `</TD>`, and `</TR>` lines.


FIG. 5

80

```

<TABLE width = "65" border = "1" cellspacing = "0" cellpadding = "2">
  <TR>
    <TD class = "buttonText" nowrap = "yes">
      <A class = "buttonText" href="javascript:alert('OUCH-stop that!')">Click Me</A>
    </TD>
  </TR>
</TABLE>

```

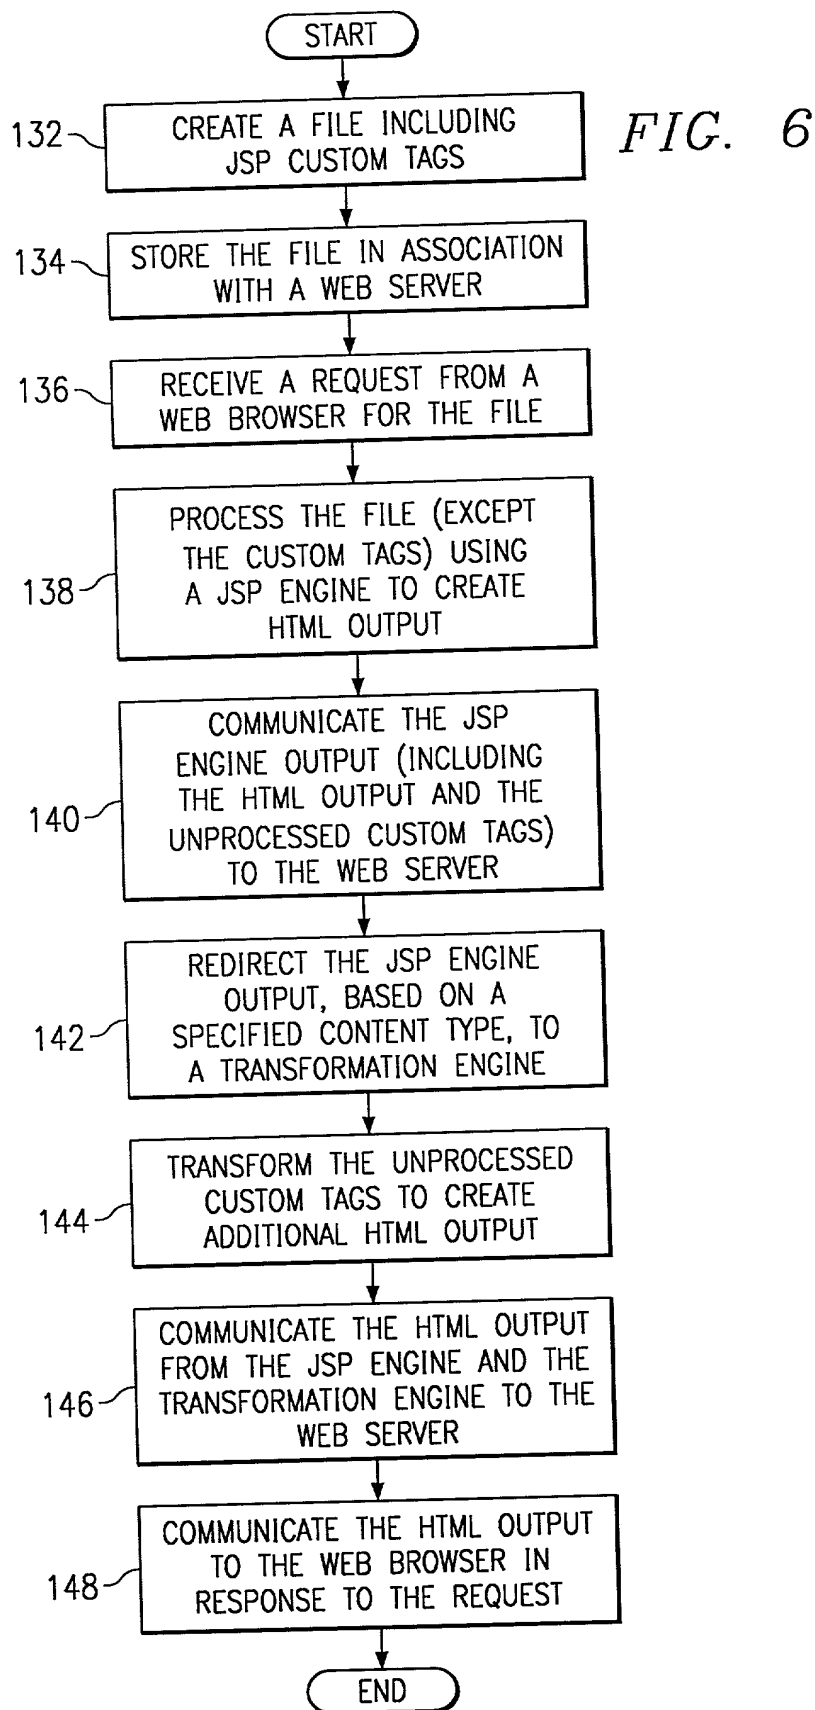

008260" 08/5/95

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention or design entitled SYSTEM AND METHOD FOR TRANSFORMING CUSTOM CONTENT GENERATION TAGS ASSOCIATED WITH WEB PAGES, the specification of which is attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed</u> (Yes) (No)
-----NONE-----			

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
-----None-----		

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Kevin J. Meek	Reg. No. 33,738
T. Murray Smith	Reg. No. 30,222
Barton E. Showalter	Reg. No. 38,302
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Terry J. Stalford	Reg. No. 39,522
Christopher W. Kennerly	Reg. No. 40,675
Harold E. Meier	Reg. No. 22,428
Douglas M. Kubehl	Reg. No. 41,915
Samir A. Bhavsar	Reg. No. 41,617
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
Jay B. Johnson	Reg. No. 38,193
Robert W. Holland	Reg. No. 40,020
James L. Baudino	Reg. No. 43,486
Tara D. Knapp	Reg. No. 43,723
William R. Borchers	Reg. No. 44,549
Brian W. Oaks	Reg. No. 44,981
Luke K. Pedersen	Reg. No. 45,003
Matthew B. Talpis	Reg. No. 45,152
David M. Doyle	Reg. No. 43,596
Keiko Ichiye	Reg. No. 45,460
Jeffery D. Baxter	Reg. No. 45,560
Thomas A. Beaton	Reg. No. 46,543
Kurt M. Pankratz	Reg. No. 46,977
Brian E. Szymczak	Reg. No. 47,120
Thomas J. Frame	Reg. No. P47,232

Patent Agents:

Brian A. Dietzel	Reg. No. 44,656
Kevin R. Imes	Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys/agents with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent

applications filed thereon before any international authorities.

Send Correspondence To:

Baker Botts L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Christopher W. Kennerly
at (214) 953-6812
Atty. Docket No. 020431.0732

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the sole inventor

Larry P. Mason

Inventor's signature

Larry P Mason

Date

Sept 26, 2000

Residence (City, County, State)

Corinth, Denton County, Texas

Citizenship

United States of America

Post Office Address

2107 Birdwood Circle
Corinth, Texas 76210

008250" 09/25/99